



305 x 610mm x 6.5mm  
**RM 3.88**  
/sqft

# SPC CELESTIAL FLOORING

**COMMERCIAL GRADE QUALITY  
FOR MODERN INTERIORS.**

## WELCOME TO SPC CELESTIAL FLOORING


Immerse yourself in a fantasy space where luxury design aesthetics meet soft and soothing textures. A perfect blend of elegance and comfort for a truly elevated interior experience.



**FANTASY SPACE  
LUXURY DESIGN AESTHETIC  
SOFT & SMOOTHING**

**8**

**FLOORING  
OPTION**



# ADVANTAGES



Zero Dirt



Waterproof



Air Quality  
A+



Smoke Burning  
Resistance



withstand  
Voltage



SVHC Not  
Chemically  
Toxic



Zero  
Formaldehyde



Fire  
Resistance



Ultra high  
Basticity



Fine  
Embossing



Anti  
Termites

## TECHNICAL SPECIFICATION

TECHNICAL SPECIFICATION	STANDART	CHARACTERISTIC
Dimension	ISO 24342	305 x 610 mm
Overall Thickness	ISO 24346	6.5mm
Thickness Wear Layer	ISO 24340	0.3mm
Dimension Stability	ISO 23999	Everage: 0.0mm
Curling		Length flatness(v): concave:0.3%, Convez
Flatness	ISO 10582	Width flatness(v): concave:0.06%, Convez: +0.03%
Light Fastness	EN ISO 105-802	GRADE (B.W.S): BETTER THAN 6
Castor Chair	ISO 4918:2016 +AMD.1:2018	No Visible Damage
Residual Indentation	ISO 24343-1	Average: 0.01mm
Binder Content	ISO 10582	100% (comly with type 1)
Antibacterial	JIS Z 2801	Staphy facoccus aureus ATCC 6538P:Less than 1.5 cells/cm2 escherichia co ATCC 8739:0 cells/cm2
Water Absorption	ASTM D570	0.07%
Heavy Metal Content	EN 71-3:2019+A1	Not Detected or lower than limit value of Heavy Metal in the product
Emission To Air (ETA)	ISO 16000-9/COR1-2007/ ISO 16000-6/ISO16000-3	EN 71-3:2019+A1
Volatile Organic Compound	CPCT/TP/IN-HOUSE 03 5 based on ISO 11 890-2(HS-G CMS)	Not Contain or lower than limits value of Aromatic Hydrocarbon, Cyclo, Alcohol, Hydrocarbones, Acid, Ester and etc in the products.
Quality Management	ISO 9001	Not Detected or lower than limit value of Benzene, Toluene, Ethylbenzene, xylene, oher Voccs in the products
Environmental Management System	ISO 14001	Achieved ISO 9001
Singapore Green Label Scheme	SGL S	Achieved ISO 14001
My Hijau Mark Malaysia	MY HIJAU	Achieved SGLS
Decor Film	SIRIM	Achieved MyHijau
		High quality with light fastness value 6 and above (SIRIM)



**CARPET  
PRIMA**  
KILANG NILAI 3

**SCF9901-99**



**SCF9903-99**



**SCF9902-99**



**SCF9904-99**





**SCF9907-99**



**SCF9905-99**



**SCF9906-99**



**SCF9908-99**





# FLOORING OPTION

SCF9901-99

SCF99902-99

SCF99903-99

SCF99904-99


SCF99905-99

SCF99906-99

SCF99907-99

SCF99908-99

<b>SIZE:</b>	<b>305 x 610MM x 6.5MM</b>
<b>THICKNESS:</b>	<b>6.5MM</b>
<b>WEAR LAYER:</b>	<b>0.3MM</b>

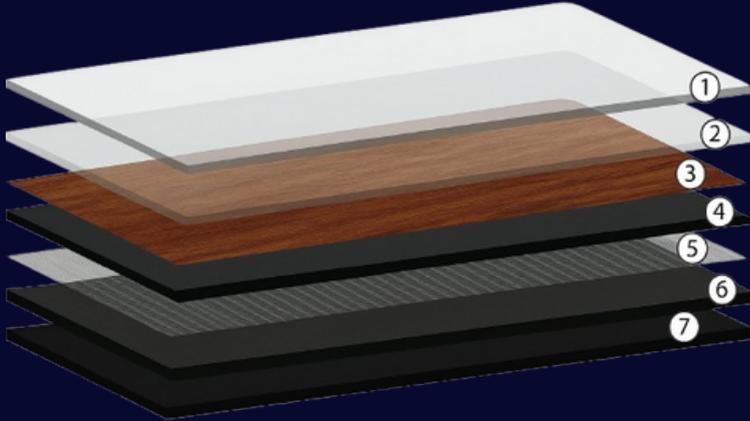

- 1. UV Coating
- 2. Wear resistant layer
- 3. Decorative layer
- 4. Oprer bottom
- 5. glass fiber
- 6. miodle bottom
- 7. Lower layer bottom



Dry Care



Anti slip



Waterproof



Fire Retardant




Easy Care



Environment Friendly

## U-CLICK SYSTEM

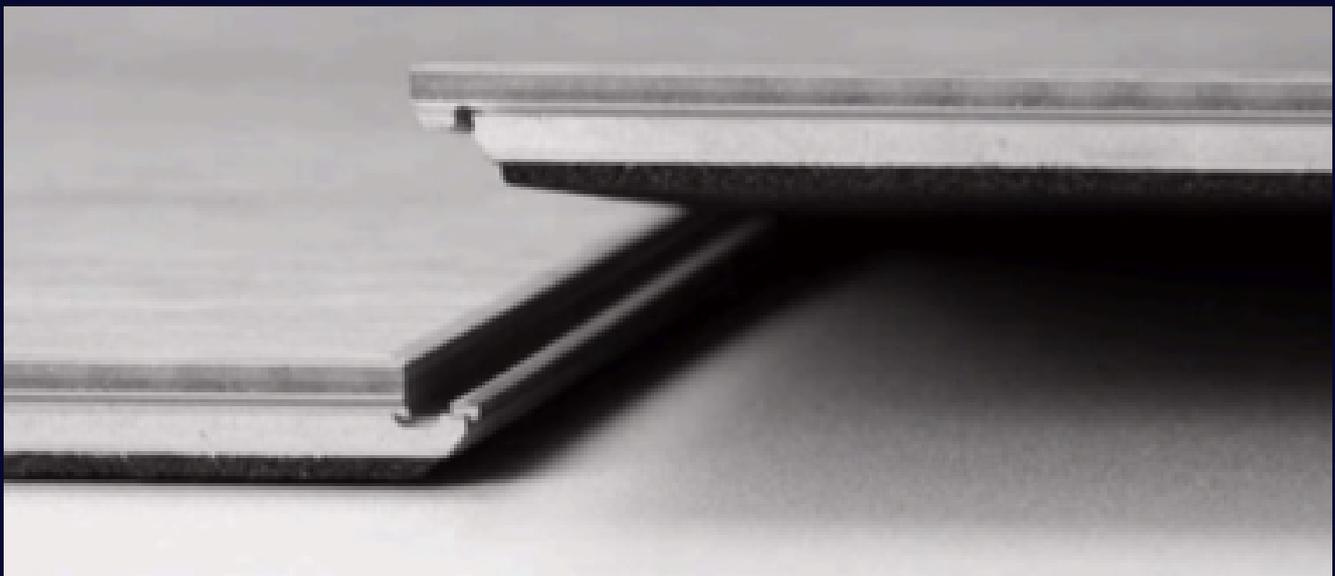

**Stronger Seam Connection**  
Tight, secure locking system reduces gaps between planks over time.

**Durability and Stability**  
with stand temperature changes and humidity better than traditional glue - down floor.

**Clean Look**  
Uniform surface with fewer visible joints.